



SPECS

FRAME	
SIZES	SM / MD / LG / XL
COLOUR	SILVER
FRAME	SERIES 3 CUSTOM BUTTED AND HYDROFORMED 6013 ALLOY FRONT TRIANGLE AND SWINGARM / 203MM TRAVEL
FORK	ROCKSHOX BOXXER SELECT RC / 203MM TRAVEL
REAR-SHOCK	MARZOCCHI BOMBER CR
HEADSET	PRESTINE PT-F13
COMPONENTS	
HANDLEBARS	RACEFACE CHESTER 35 / 780MM / 35MM
STEM	RACEFACE CHESTER 35 / DIRECT MOUNT
GRIPS	ODI ELITE MOTION
SADDLE	SARACEN CUSTOM DH CRMO MTB
SEATPOST	RACEFACE CHESTER / 30.9MM / 325MM
PEDALS	ALLOY MTB / SEALED BEARINGS / REPLACEABLE PINS
DRIVE TRAIN	
SHIFTERS	SHIMANO ZEE M640 RAPIDFIRE PLUS / 1X10 SPEED
REAR-DERAILLEUR	SHIMANO ZEE M640 SHADOW PLUS / 10 SPEED
CHAIN DEVICE	MRP G4 CS
CHAINSET	SAMOX / SARACEN CUSTOM / 36T / 165MM
CHAIN	SHIMANO HG54
CASSETTE	SHIMANO DEORE CS-HG500 / 10 SPEED / 11-25T
BRAKES	SHIMANO MT520 203/203MM
BRAKE-LEVERS	SHIMANO MT501
WHEELS	
RIMS	JALCO / 32H / 27.5"
HUBS	FORMULA BOOST 20 X 110 SEALED BEARING 32H FRONT / KT 12 X 150 SEALED BEARING 32H REAR
SPOKES	DOUBLE-BUTTED STAINLESS STEEL
TYRES	MAXXIS DHRII / 27.5 X 2.4 / DH CASING

FEATURES

- Series 3 custom butted and hydroformed 6013 alloy front triangle and swingarm, signature TRL suspension design, 12 x 150mm dropout system, 203mm travel
- Shock: Marzocchi Bomber CR, Rebound Adjust, 241 x 76
- Fork: Rockshox BoXXer Select RC, 203mm travel, DebonAir, low speed compression, rebound adjust, 20 x 110, Maxle Stealth DH
- Drivetrain: Shimano Zee M640 10 Speed, 11-25T, MRP G4 CS chain device
- Brakes: Shimano MT520 calipers with MT501 Deore levers
- Components: Raceface Chester 35 bar and direct mount stem, ODI grips, Raceface seatpost

GEOMETRY

SIZE	S	M	L	XL
SEAT TUBE (MM)	400	400	400	400
TOP TUBE (MM)	593	613	630	653
REACH (MM)	420	440	460	480
STACK (MM)	602	602	602	611
HEAD TUBE (MM)	115	115	115	125
HEAD ANGLE (°)	63.0	63.0	63.0	63.0
SEAT ANGLE (°)	74.0	74.0	74.0	74.0
CHAINSTAY (MM)	440	440	440	440
BOTTOM BRACKET DROP (MM)	1.5	1.5	1.5	1.5
WHEELBASE (MM)	1226	1246	1266	1294

The image above is for illustration purposes only. Saracen reserves the right to change spec, colour, features and price without prior warning.


MYST AL

EXPLODED DRAWING

SARACEN

 RECOMMENDED THREADLOCK: MEDIUM STRENGTH
REMOVABLE ANAEROBIC THREADLOCKER

 RECOMMENDED GREASE: WATERPROOF GREASE
(SUCH AS PARK TOOL POLYLUBE)

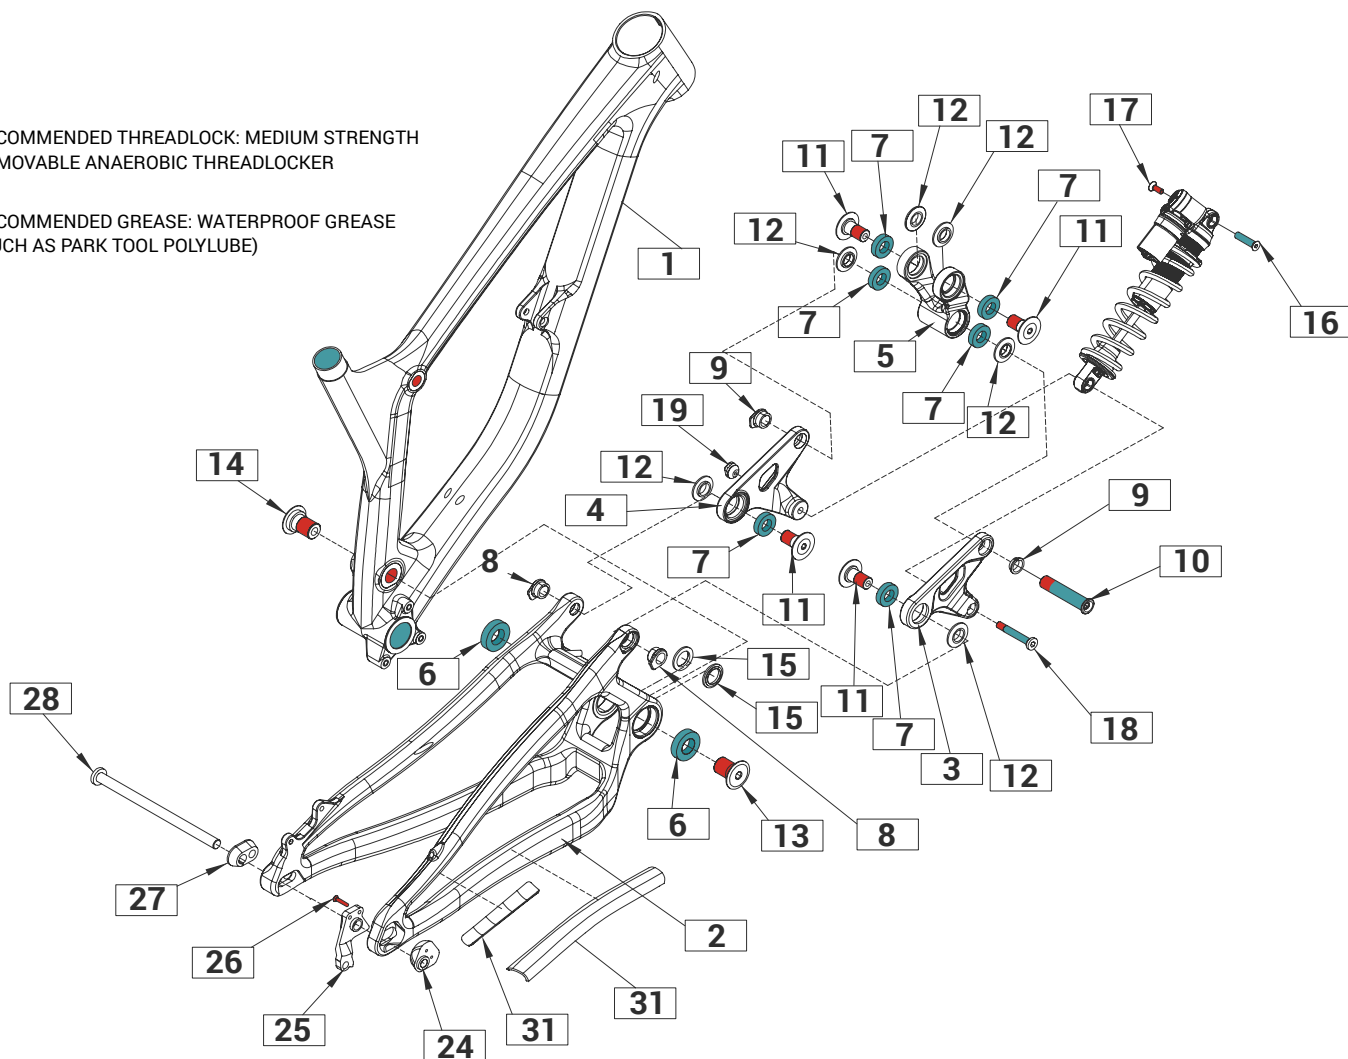

ITEM	PART NUMBER	DESCRIPTION	QTY NEEDED	TORQUE	NOTES
1	N/A	MYST 27.5 ALLOY FRONT TRIANGLE	1	-	
2	N/A	MYST 27.5 ALLOY SWING ARM	1		
3 & 4	RNS5280	MYST AL PUSH LINKS (PAIR)	1		PART NUMBER INCLUDES ITEM 3 & 4
5	RNS5268	MYST ROCKER LINK 2019 - 2021	1		
6	N/A	MYST MAIN PIVOT BEARINGS 6904.RS	2		
7	N/A	MYST LINKAGE BEARINGS 6902.RS	6		
8	RNS5284	MYST SWING ARM INSERTS (PAIR)	2		
9 & 10	RNS5226	MYST LINKAGE TO LINKAGE BOLT	1	24NM	PART NUMBER INCLUDES ITEM 9 & 10
11 & 12	RNS5225	MYST LINKAGE BOLTS (PAIR)	4	24NM	PART NUMBER INCLUDES ITEM 11 & 12
13 & 14 & 15	RNS5224	MYST MAIN AXLE BOLTS (PAIR)	1	36NM	PART NUMBER INCLUDES ITEM 13 & 14 & 15
16 & 17	RNS5172	MYST UPPER SHOCK BOLT	1	9NM	PART NUMBER INCLUDES ITEM 16 & 17
18 & 19	RNS5231	MYST LOWER SHOCK BOLT	1	15NM	PART NUMBER INCLUDES ITEM 18 & 19
24 & 26 & 27	RNS5279	MYST AL AXLE TAP / THREAD BLOCK	1	5NM	
25	RNS4053	MYST AL HANGER DIRECT MOUNT	1		
25	RNS4054	MYST AL HANGER NON-DIRECT MOUNT	1		
28	RNS5277	MYST AL WHEEL AXLE	1	15NM	
31	RNS5213	MYST CHAINSTAY PROTECTOR SET	1		

MYST AL

TECHNICAL INFORMATION

SARACEN

MODEL	MYST AL
FRAME MATERIAL	AL-6013
REAR TRAVEL	200MM
SHOCK LENGTH / STROKE	241MM X 76MM
SHOCK SAG	19MM ~ 23MM
SAG EYE TO EYE	222MM – 218MM
PIGGY BACK COMPATIBLE	YES
FRAME SHOCK BUSHING	22MM X 8MM
LINKAGE SHOCK BUSHING	22MM X 10MM
RECOMMENDED / MAX FORK LENGTH	581MM / +20MM
OFFSET	44-52MM
RECOMMENDED / MAX FORK TRAVEL	27.5"; DC 200MM
MAXIMUM TYRE	27.5" X 2.6"
BRAKE MOUNT TYPE	IS160
MAX REAR ROTOR	200MM
SEAT POST	30.9MM
SEAT COLLAR	34.9MM
BOTTOM BRACKET TYPE	BSA83
ISCG	05
CRANK CHAINLINE	SUPER BOOST
MAX CHAIN RING	38T
REAR HUB TYPE	12 X 157



MARZOCCHI SUSPENSION

SETUP GUIDE

Marzocchi CR / 9.5 x 3.0

RIDER WEIGHT (LBS)	RIDER WEIGHT (KGS)	PRESSURE (PSI)	SAG (%)	SAG (MM)	LSR (CLICKS)	LSC (CLICKS)
90	41	250	25-30%	19-23MM	12-13	15-16
110	50	275	25-30%	19-23MM	11-12	15-16
130	59	300	25-30%	19-23MM	10-11	14-15
150	68	325	25-30%	19-23MM	9-10	14-15
170	77	350	25-30%	19-23MM	8-9	13-14
190	86	375	25-30%	19-23MM	7-8	13-14
210	95	400	25-30%	19-23MM	6-7	12-13
230	104	425	25-30%	19-23MM	6-7	12-13

NOTE: ALL CLICKS ARE FROM FULLY CLOSED POSITION

The image above is for illustration purposes only. Saracen reserves the right to change spec, colour, features and price without prior warning.